


## Technical Data Sheet Solid Particle Core, Interior Usage

### PV2100

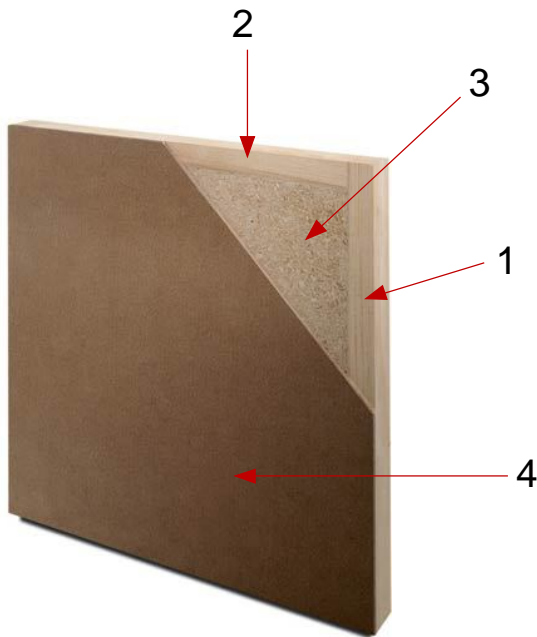

- 1- Stiles 1 1/4" (31mm) in solid wood or finger joint pine  
Thickness 1 3/8" (35mm) or 1 3/4" (44mm)  
Manufacture Choices:  
1 1/8" (28mm) x 15/32" (29.36mm)  
1 1/2" (38mm) x 1 7/16" (44mm)  
1 3/4" (44mm) x 1 3/4" (44mm)
- 2- Top and bottom rail 1 1/4" (31mm) in solid wood or finger joint pine
- 3- Solid particle core. Density of 28 pounds per cubic foot (449 kg per cubic meters) Conforms to C.S.A. 0188. Lock Block integrated
- 4- 2 Faces in different veneers (Birch, Lauan, Masonite) and mould skin to match interior door.

PVA Synthetic adhesive glue meet the NWWDA I.S. 16-87 Type 1 Door code

Approve for 20 min ULC Door without plastic laminated

1 year warranty for interior use only  
For more details, contact Les Portes Veilleux

#### Options and Notes:

These are all gross dimensions.

Available with 20 min. Warnock Hersey Label.

All stiles and rails are glue to core.

Special project on demand.

The raw material is recycle to 100% and certified (FSC) by our suppliers.

Excellent choice for commercial and residential application.